




## MANUAL RELEASE BUTTON

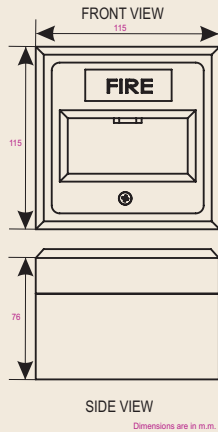

### Specification

Voltage	9 - 30Vdc / 230Vac
Current	3A
Switching	SPCO
Element Type	Glass / Plastic (resettable)
Temperature	- 10°C to + 55°C
Protection	Ip42
Construction	ABS
Weight	0.19Kg
Colours	GREEN

## GAS REALEASE

The devices provides simple changeover contacts for use extinguish fire systems.


PROVEN DESIGN, APPROVED & CERTIFIED Ip42 STANDERD  
SECURE AND CONVENIENT FLAP FIXING IN FRONT COVER  
RESETTABLE TRANSPARENT PLASTIC ELEMENTS TO PRESS  
IN CASE OF REAL FIRE IDENTIFICATION BY EYEWITNESS.  
ONE KEY FOR TEST AND RESET INCLUDING FIXING HARD  
-WARE COMES INSIDE THE PACKING BOX.



MAKE:-NATIONAL SECURITY DEVICES



# ABORT BUTTON

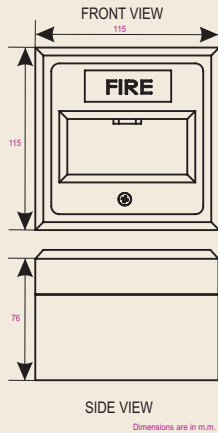

### Specification

Voltage	9 - 30Vdc / 230Vac
Current	3A
Switching	SPCO
Element Type	Glass / Plastic (resettable)
Temperature	- 10°C to + 55°C
Protection	Ip42
Construction	ABS
Weight	0.19Kg
Colours	YELLOW

# ABORT BUTTON

The devices provides simple changeover contacts for prevent the extinguish for gas/clean agent for fake fire accident.


PROVEN DESIGN, APPROVED & CERTIFIED IP42 SLANDERED  
SECURE AND CONVENIENT FLAP FIXING IN FRONT COVER  
RESETTABLE TRANSPARENT PLASTIC ELEMENTS TO PRESS  
IN CASE OF FAKE FIRE IDENTIFICATION BY EYEWITNESS.  
ONE KEY FOR TEST AND RESET INCLUDING FIXING HARD  
-WARE COMES INSIDE THE PACKING BOX.



MAKE:-NATIONAL SECURITY DEVICES



## STROBE CUM HOOTER

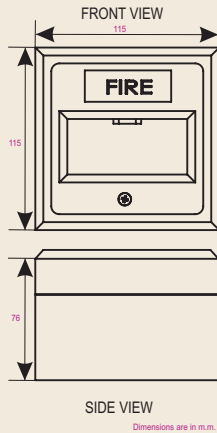

### FEATURES

ABS Plastic Body  
High Sound output/Light source  
Wall Mounted / Ceiling Mounted

### SPECIFICATIONS

Voltage: 20-30 V.D.C.  
Alarm Current: 95 mA  
Dimension mm: 185x130x70  
Sound Output: 100db/1m  
Light: 1.2WS with 2 seconds cycle  
Colour:Red  
Material of Construction.: FR Polymer

### INTRODUCTION

These are 24 VDC Operated Electronic Hooter Cum Strobe with Multi Tone Output. The Multi Tone Sounder Cum Strobe is Designed to give the Audio & Visual Indication in case of Fire & Emergency. The Multi Tone Sounder Cum Strobe can be connected to any Conventional Fire Alarm System & also can be connected with Addressable Fire Alarm System Via Control Modules.



MAKE:-NATIONAL SECURITY DEVICES